


ILS or LOC RWY 18
CHARLOTTE/DOUGLAS INTL (CLT)

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 on heading 090° and CTF VOR/DME R-337 to HADUM/CTF 27 DME/RADAR and hold.

CHARLOTTE TOWER			GND CON	
118.1	257.8	(18-36)	121.8	348.6 (W)
126.4	257.8	(1R-19L)	121.9	348.6 (E)
122.25	257.8	(11-19R)		

D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1	257.8 (18-36)	121.8 348.6 (W)
	120.05 (120°-295°)	307.8 (360°-179°)	126.4	257.8 (1R-19L)	121.9 348.6 (E)
	134.75 (296°-360°)		133.35	257.8 (1L-19R)	

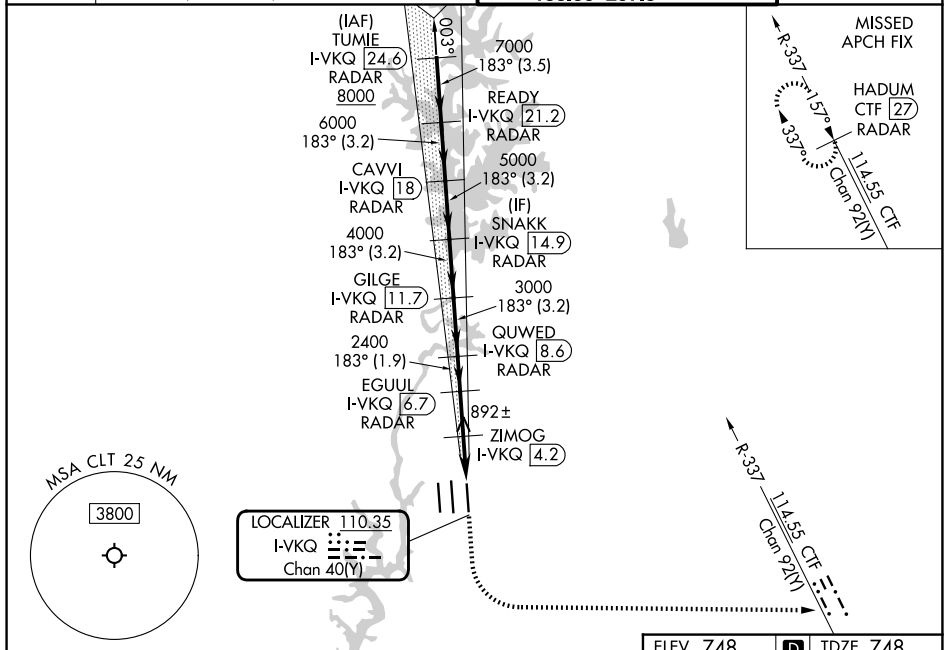

ILS Data:

Category	A	B	C	D
S-ILS 18	1002/40 254 (300-¾)			
S-LOC 18	1260/55 512 (600-1)		1260-1⅓ 512 (600-1⅓)	

ZIMOG FIX MINIMUMS (DME REQUIRED)

Category	A	B	C	D
S-LOC 18	1160/55 412 (500-1)		1160/60 412 (500-1¼)	

SE-2, 03 SEP 2026 to 01 OCT 2026

SE-2, 03 SEP 2026 to 01 OCT 2026