

ILS or LOC RWY 27
ATHENS/BEN EPPS (AHN)

▼ Circling Rwy 2, 20 NA at night. VDP NA when using WDR altimeter setting.
▲ DME from AHN VOR/DME. Simultaneous reception of I-AHN and AHN DME required.
 When local altimeter setting not received, use WDR altimeter setting and increase S-ILS 27 DA to 1069 feet; increase all MDAs 60 feet and S-LOC 27 visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat D $\frac{1}{4}$ SM. Inop table does not apply to S-ILS 27 all Cats.



MISSED APPROACH:
Climb to 1500 then climbing
left turn to 2500 on heading
060° and AHN VOR/DME
R-092 to VESTO INT/
AHN 23.6 DME and hold.

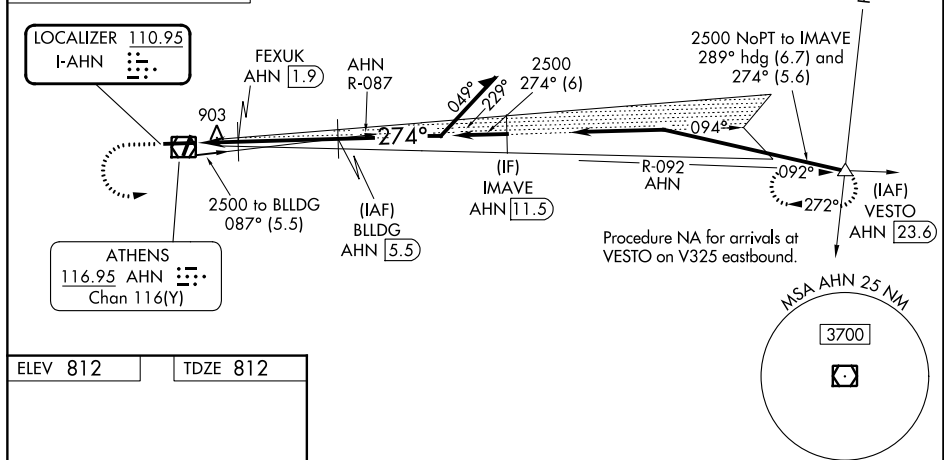


Diagram Labels:

- TWR/BCN
- 6122 X 100
- 0.9% UP
- 274°
- 27°
- 395 X 100
- 0.9% UP

Table:

Category	A	B	C	D
S-ILS 27	1012- ³ / ₄	200 (200- ³ / ₄)		
S-LOC 27	1160- ³ / ₄	348 (400- ³ / ₄)		

Diagram Labels (Right):

- 1500
- 2500
- hdg R-092
- VESTO
- BILDG
- AHN 5.5
- 2500
- 094°
- 274°
- 2500
- GS 3.00°
- TCH 40
- 1 NM
- 0.7 NM
- 3.6 NM
- A
- B
- C
- D

Table:

Category	A	B	C	D
S-ILS 27	1012- ³ / ₄	200 (200- ³ / ₄)		
S-LOC 27	1160- ³ / ₄	348 (400- ³ / ₄)		

Diagram Labels (Bottom):

- 1260-1
- 448 (500-1)
- 1280-1
- 468 (500-1)
- 1320-1½
- 508 (600-1½)
- 1460-2
- 648 (700-2)

ATHENS/BEN EPPS (AHN)
ILS or LOC RWY 27

SE-4, 03 SEP 2026 to 01 OCT 2026